


# GSFR XX V LL-B

WITH SOLDER WIRE PERFORATION

Guide kit Ref.	Guide tube Ref.
GSFR08V03-B	0029648
GSFR08V05-B	0029649
GSFR08V06-B	0029650
GSFR08V07-B	0029651
GSFR08V10-B	0029652
GSFR08V15-B	0033759
GSFR10V03-B	0029653
GSFR10V04-B	0034478
GSFR10V05-B	0029981
GSFR10V06-B	0029654
GSFR10V07-B	0029655
GSFR10V10-B	0029656
GSFR10V15-B	0030926
GSFR12V03-B	0029657
GSFR12V05-B	0030647
GSFR12V07-B	0031537
GSFR12V10-B	0029658
GSFR15V03-B	0029659
GSFR15V04-B	0029660
GSFR15V05-B	0029661
GSFR15V07-B	0031538
GSFR15V10-B	0029662
GSFR15V15-B	0029663
GSFR16V03-B	0029664
GSFR16V04-B	0029665
GSFR16V05-B	0031468
GSFR16V15-B	0029666

Tabla general		
Wire diameter		
XX	Diameter of use	
08	∅ 0,8 mm	∅ 0,032 in
10	∅ 1,0 mm	∅ 0,040 in
12	∅ 1,2 mm	∅ 0,047 in
15	∅ 1,5 mm	∅ 0,059 in
16	∅ 1,6 mm	∅ 0,063 in

Tube length		
LL	Length	
03	0,3 m	11,81 in
04	0,4 m	15,75 in
05	0,5 m	19,69 in
06	0,6 m	23,62 in
07	0,7m	27,56 in
10	1,0 m	39,37 in
15	1,5 m	59,05 in

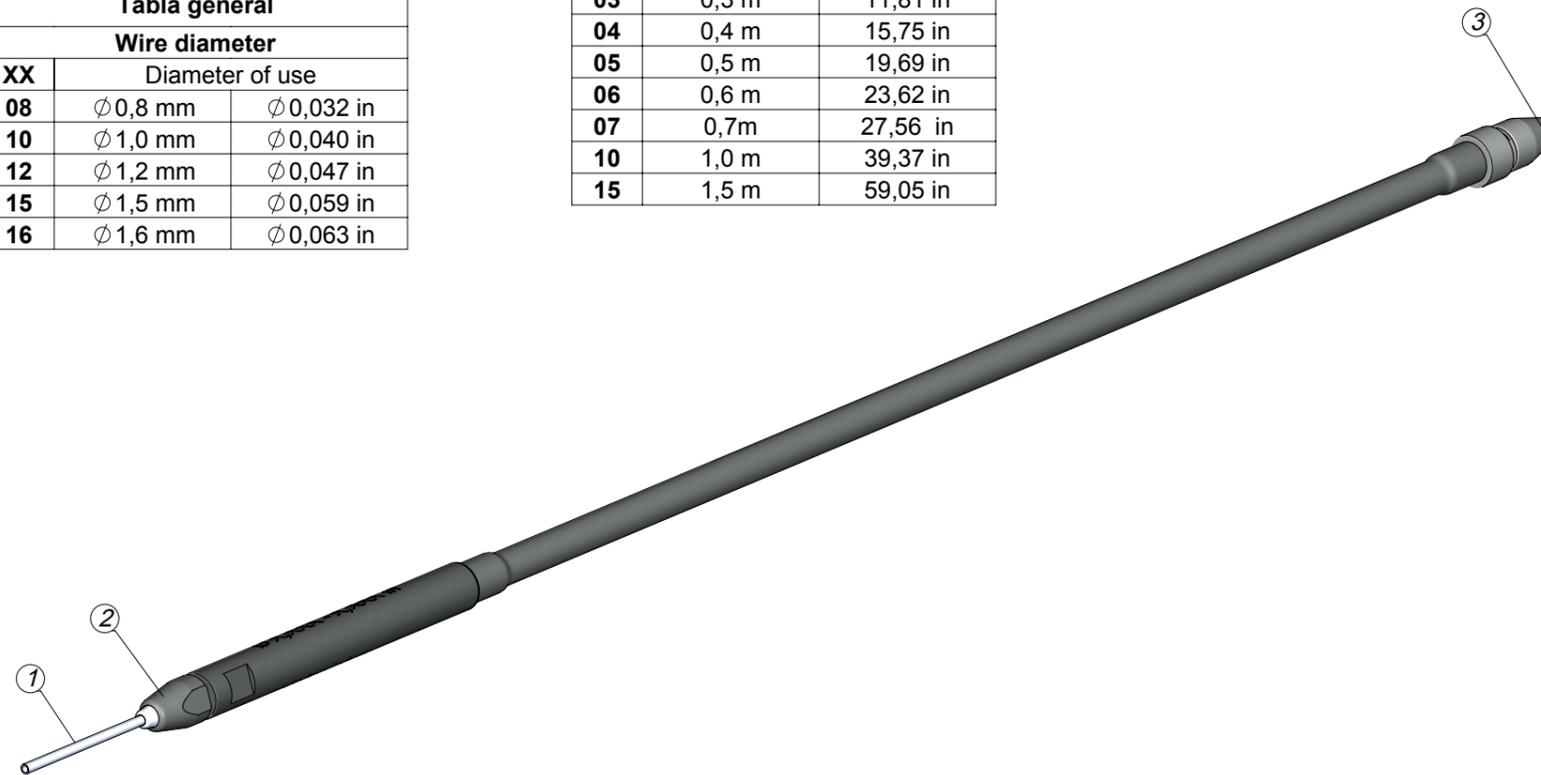

	Guide wheel Ref.	Blade Ref.	Blade clamp Ref.	Inlet nozzle Ref. (for SFR-A)	Interm. nozzle Ref.	Inlet nozzle Ref. (for SFR-B)	Counter wheel Ref.	Screws Ref.	Threaded stud Ref.	Needle	Metal cap	Input tube guide
<i>Tube length</i> <i>Wire ∅</i>												
GSFR08VLL-B	0021696	0021555	0018638	0023740	0024955	0030537	0026693 (Provide with SFR)	0026695	0026696	0029943	0029948	0029950
GSFR10VLL-B	0021699			0023741	0024956	0030538				0029944		
GSFR12VLL-B	0023738			0023736	0024957	0030539				0029945		
GSFR15VLL-B	0019696			0023855	0024958	0030540	0029946			0029947		
GSFR16VLL-B	0025922			-	0024959	0030541	0026694					0029951